


Copyright 2021 -

RoHS Compliant

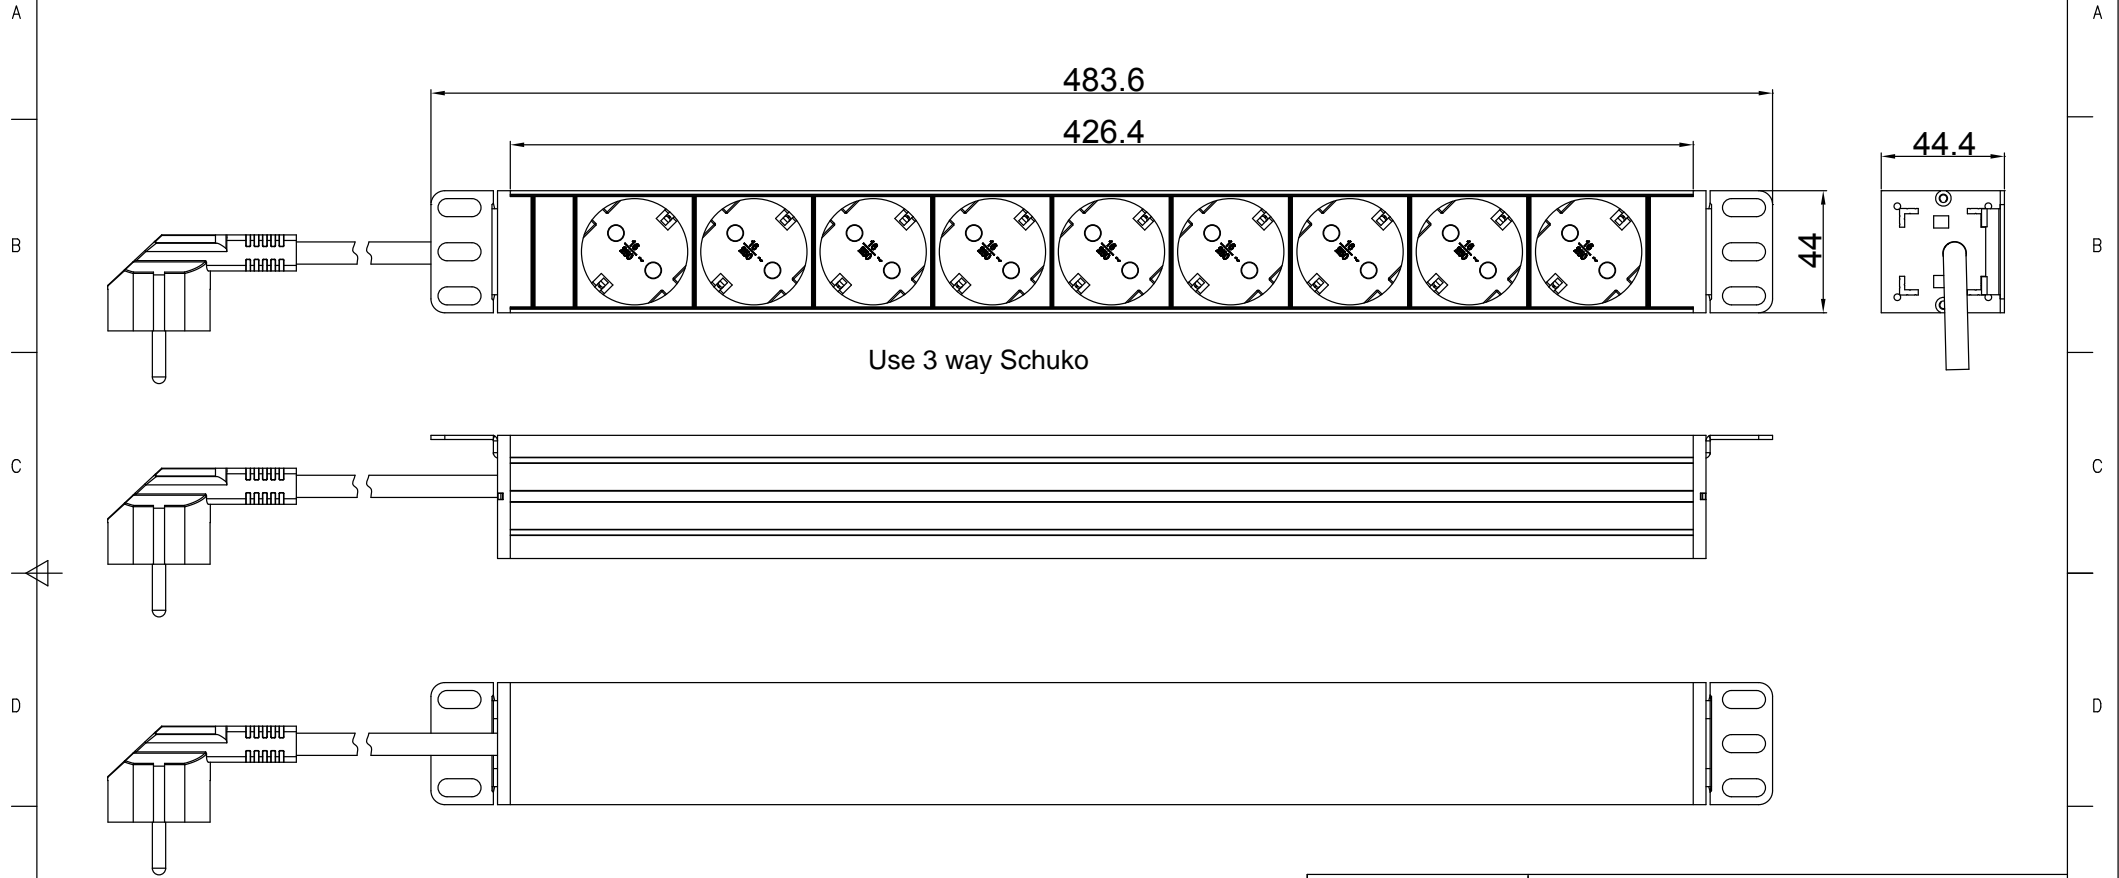

Use 3 way Schuko

<p>Basic Series</p> <p>All Plastic In Black</p>			<p>OUTPUT</p> <p>(9) Schuko Socket (16A Rated)</p>			<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>			<p>Revisions</p> <table border="1"> <thead> <tr> <th>Rev</th> <th>Description</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>		Rev	Description	Date				<p>Revisions</p> <table border="1"> <thead> <tr> <th>Rev</th> <th>Description</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>		Rev	Description	Date				<p>DRAWING TYPE</p> <p>CATIA (NO PERMISSION, NO CHANGING)</p>		<p>PDU9CEE7/3</p>			
Rev	Description	Date																												
Rev	Description	Date																												
<p>INPUT</p> <p>190-250VAC 16A 50HZ Schuko Plug 2m H05VV-F3G1.5mm² Power Lead</p>			<p>BRANCH CIRCUITS</p> <p>(NONE)</p>			<p>MOUNTING ACCESORIES</p> <p>(2) 42 Bracket</p>			<p>unit=mm</p> <p>TECHNICAL STANDARD 1.IT11; 2.NO RUST 3.NO FLAW ON THE SURFACE</p>		<p>Housing</p> <p>Aluminium Silver Anodize</p>		<p>FILLET R0.5 ANGLE ±0.5° FIRST ANGLE</p>																	
<p>DATE 29-07-2021</p>																														