


Installation Cable Cat. 6A, U/UTP, 4P, 650 MHz, LSFRZH, grey, Ø 7.7mm, WARP, Dca, 500 m

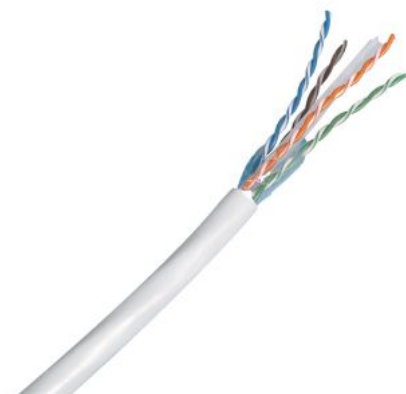

010.1560 / similar product

## DESCRIPTION

Solid wire installation cable U/UTP Cat. 6A. 100 Ohm impedance. Data transmission frequencies of up to 650 MHz.

## TECHNICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Cable type	Single cable
Cable design	normal
Cable application	indoor use
Cable length	500 m
Armor	No protection
Outer sheath material	LSFRZH
Wire type	Wire
Number of wires	8
Category	Cat. 6A
Stranding	4 pairs
Wire diameter	AWG 23
Shielding	U/UTP
Cable overall diameter	Ø 7.7mm
Max. test frequency	650
PoE	Yes
PoE Level	4
CPR classification	Dca
Standard	IEC 60332-1-2

## MECHANICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Color	gray
Cable Length	500.0 m / 1640 ft

## ENVIRONMENTAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Operation temperature	-20 °C to +60 °C / -4 °F to +140 °F